

**MQ15-X-Power male 0°**

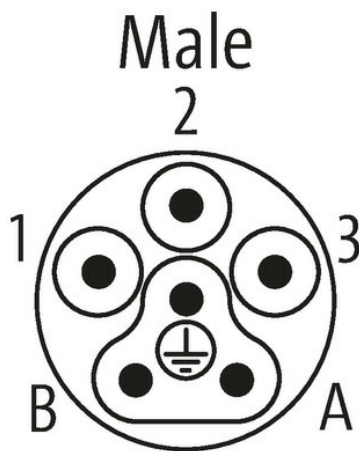
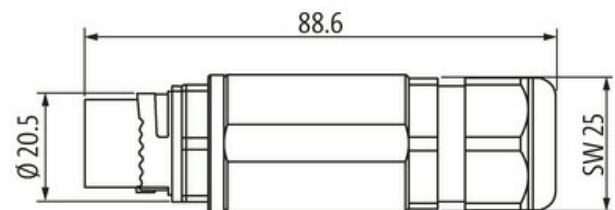
self-assembly 6-13 mm

Male straight

MQ15 X-Power  
field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 600 V AC (Power); max. 63 V AC/DC (Signal)
Rated surge voltage	6.0 kV
Operating current per contact	max. 16 A (Power); max. 10 A (Signal)
No. of poles	6
Connection	Crimp
Connection cross section	0.37...2.5 mm <sup>2</sup>
Sealing range (cable Ø)	6...13 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	PA
Over voltage category	3

**General data**

Material (contact)	Copper alloy
--------------------	--------------

Material (gasket)	NBR
Pollution Degree	3
Temperature range	-40...+70 °C
Material (housing)	PA

**Commercial data**

country of origin	DE
customs tariff number	85366990
EAN	4048879843812
eClass	27279218
Packaging unit	1.000