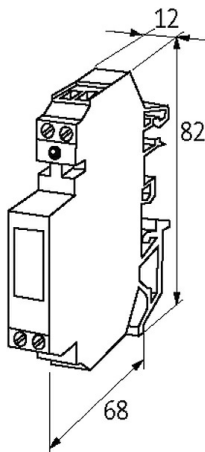
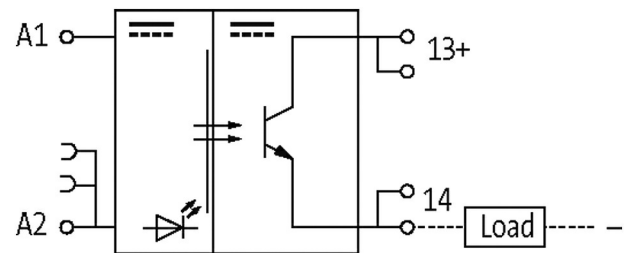


**AMMDS 10-44/0,1 OPTO-COUPLER MODULE**

IN: 53 VDC - OUT: 40 VDC / 0,1 A

Transistor 0.1 A  
24 V DC  
with minus plug link  
Double terminals on the output side

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	82x12x64 mm

**Output**

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	1.5/2 ms
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	4...40 V DC

Switching frequency	max. 300/40 Hz (resist./ind.)
---------------------	-------------------------------

Switching current per output	1 mA...0.1 A
------------------------------	--------------

**Input**

Plug link (supplied)	Art-No. 90960
----------------------	---------------

Voltage range OFF	0...3 V DC
-------------------	------------

Voltage range ON	10...53 V DC
------------------	--------------

LED display	LED (red)
-------------	-----------

Input current	6 mA
---------------	------

**Commercial data**

country of origin	CZ
-------------------	----

customs tariff number	85414900
-----------------------	----------

EAN	4048879027984
-----	---------------

eClass	27371604
--------	----------

Packaging unit	1.000
----------------	-------