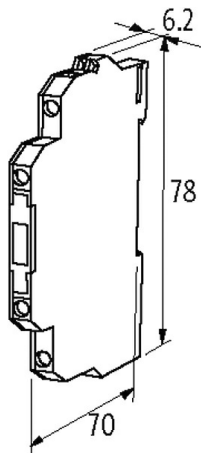



**MIRO 6.2 OPTO-COUPLER MODULE**

IN: 30 VDC - OUT: 48 VDC / 1 A

Transistor 1 A  
24 V DC  
Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

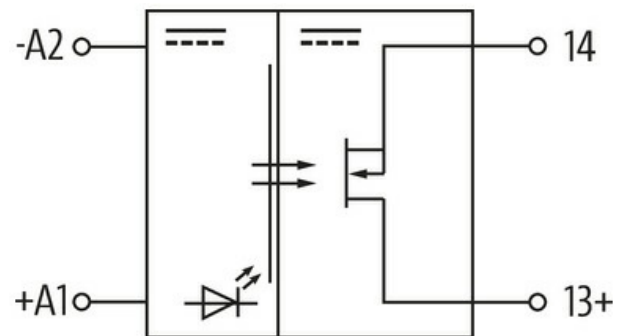**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	500 V
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

**Output**

Leakage current (output is open)	max. 25 µA
Switching time ON/OFF	1.5/1 ms (100 mA load)
Saturation voltage (across output)	max. 0.12 V DC
Switching voltage	3...48 V DC
Switching frequency	max. 40/4 Hz (resist./ind.)

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Switching current per output 500  $\mu$ A...1 A

**Input**

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	11...30 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879026826
eClass	27371604
Packaging unit	1.000