

T-COUPLER M12 6POL. CUBE67 SHIELDED

Cube67 additional actuator power supply

T-coupler

Male straight – females straight

M12 – M12, 6-pole

A-coded





shielded

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

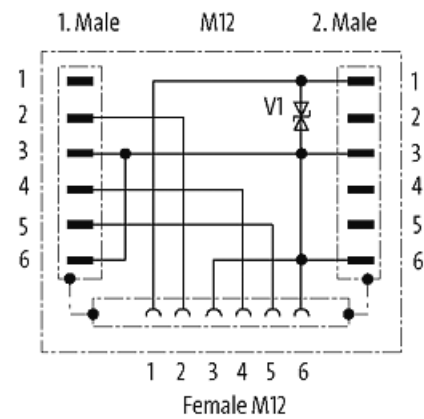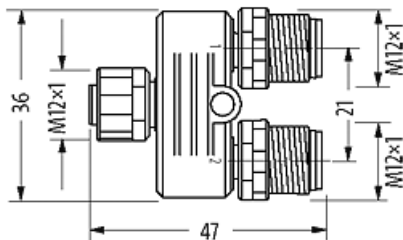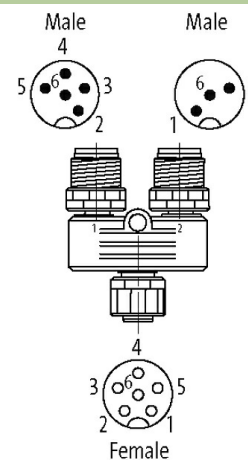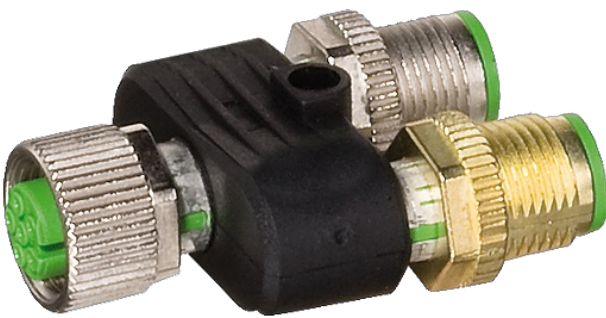

Product may differ from Image



Form

Form 46101

Technical Data

Operating voltage	18...30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A

Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)
Rated surge voltage	0.8 kV

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879139908
eClass	27143423
Packaging unit	1