

IMPACT20 PROFINET IO, DIGITAL INPUT MODULE

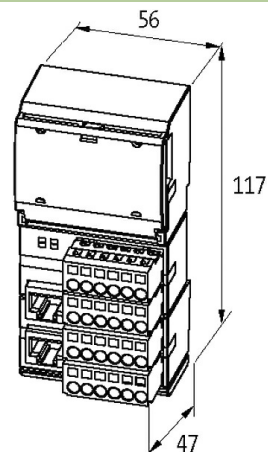
16 digital inputs

Digital inputs

DI16

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Protection	IP20
Dimensions H×W×D	117×56×47 mm

Module supply

Operating voltage	24 V DC (EN 61131-2)
-------------------	----------------------

Input

Sensor supply US	24 V DC (EN 61131-2), max. 700 mA per module, short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP

Connections

Fieldbus	Ethernet 10/100 Mbit/s; 2× RJ45 (female)
Sensor-system/actuator supply	6× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)
I/O ports	18× spring clamp plug-in terminals, max. 2.5 mm ² (max. 12 A)

PROFINET

Addressing	DCP
------------	-----

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module
Monitoring - under voltage	yes

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Monitoring - no voltage	yes
Short-circuit and overload	yes
Commercial data	
country of origin	DE
customs tariff number	85389099
EAN	4048879047951
eClass	27242604
Packaging unit	1.000