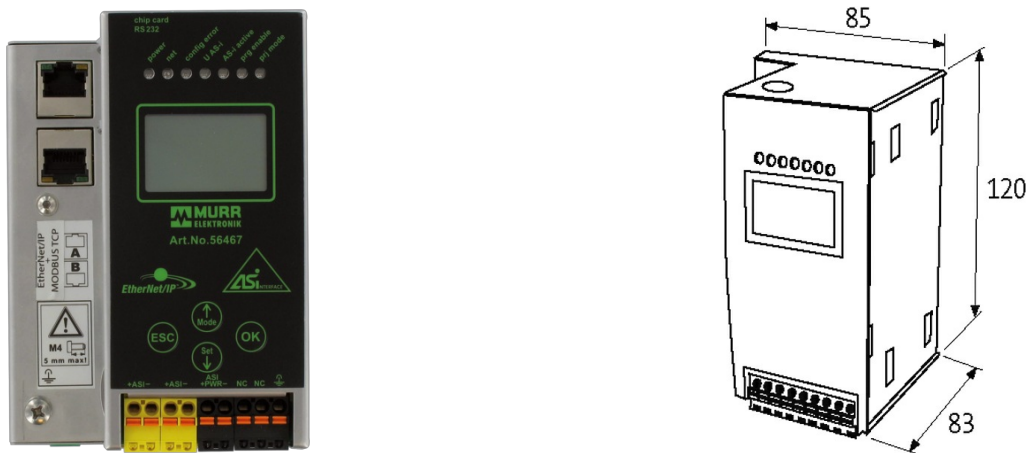



**Product discontinued until 31.10.2018, replaced by: 56469**

Gateway Ethernet-IP/AS-i, 1 Master, Spec. 3.0, IP20

Gateway-Singlemaster  
via pluggable spring clamp plug-in terminals on the front 0.5...1.5 mm<sup>2</sup>  
AS-Interface/EtherNet/IP  
Specification 3.0  
Current manuals, GSD/type data can be downloaded at: [www.murrelektronik.com](http://www.murrelektronik.com)  
Other gateways on request.

**Link to Product****Illustration**

Product may differ from Image

**General data**

Standards	EN 50295, EN 61000-6-2, EN 61000-6-4
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -25...+85 °C)
Test isolation voltage	min. 500 V
Protection	IP20
Dimensions H×W×D	120×85×83 mm

**Fieldbus**

Transfer rate	10/100 Mbps
Type	EtherNet/IP (IEEE 802.3)

**AS-Interface**

Operating current	max. 200 mA (AS-Interface)
Serial interface/diagnostic	RJ45/Fieldbus or PS2/RS232
Cycle time	150 μs × (number of slaves + 2)
Bus connection	via pluggable spring clamp plug-in terminals on the front 0.5...1.5 mm <sup>2</sup>
No. of slaves	max. 62
Specification	3.0
Operating voltage	30 V DC

**Connections**

Fieldbus	RJ45
----------	------

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

**Commercial data**

country of origin	DE
customs tariff number	85176200
EAN	4048879495707
eClass	27242208
Packaging unit	1.000