

**M12 MALE 0° FIELD-WIREABLE SCREW V4A**5-pol. 6-8mm max. 0,75mm<sup>2</sup>**F&B**

Male straight

M12, 5-pole

Sealing range (cable Ø): 6...8 mm



Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

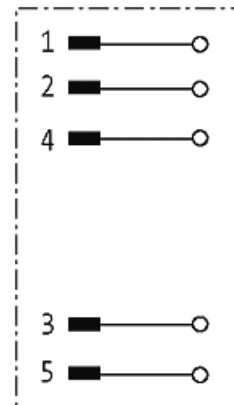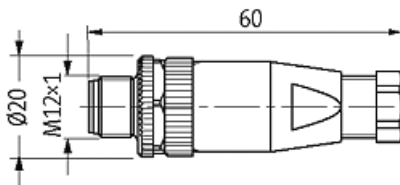

Product may differ from Image

**Form**

Form 12761

**Technical Data**

Operating voltage	max. 125 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm <sup>2</sup>
Sealing range (cable Ø)	6...8 mm
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

