

**A3 female 4-pole, Push-in, 400 V, 10 A**

A3

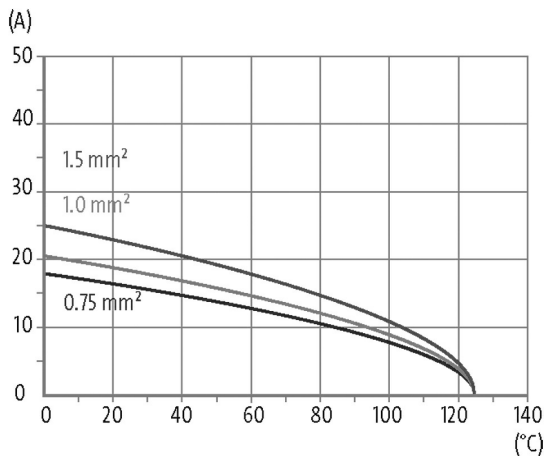


Female

4-pole

Push-In terminals

Technical data will be only guaranteed with Murrelektronik components.

Please use wire end ferrule.

**[Link to Product](#)****Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	400 V AC/DC (PIN - PIN); 230 V AC/DC (PIN - PE)
Rated surge voltage	4.0 kV
Operating current	10 A
No. of poles	4 + PE
Mating cycles	min. 500
Connection	Push-In terminals

Connection cross section	0.14...1.5 mm <sup>2</sup>
Stripping length	10 mm
Over voltage category	III

#### General data

Material (contact surface)	Ag
Pollution Degree	3
Temperature range	-40...+125 °C
Material (contact carrier)	PC
Flammability class	V-0 (acc. to UL 94)
Size	A3
Type	Female
Climatic category	40/125/21
Dimensions H×W×D	33.4×20.8×20.8 mm

#### Cables

Current load capacity	see derating curve
-----------------------	--------------------

#### Commercial data

country of origin	CN
customs tariff number	85366990
EAN	4048879764506
eClass	27143424
Packaging unit	1.000