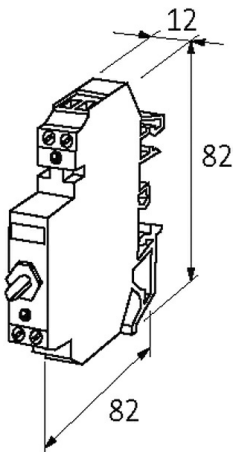
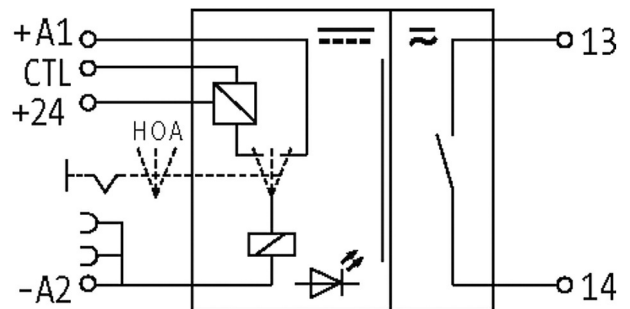


RMMDAH-CTL 11/24 OUTPUT RELAY WITH TOGGLE SWITCH

IN: 24 VDC - OUT: 250 VAC/DC / 8 A

1 relay; 1 NO contact
 8 A
 24 V DC
 CTL alarm output
 with minus plug link
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	30 000 000 switching cycles/load dependent
Dimensions H×W×D	82×12×82 mm

Output

Min. load current	100 mA
Contact material	Ag Ni

Energize/release/contact bounce time	10/10/2 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 15 Hz
Power rating (voltage dependent)	max. 2000 VA/240 W
Switching current per output	max. 8 A; CTL: 10 mA

Input

Plug link (supplied)	Art-No. 90960
Connection voltage - current	24 V DC (19.2...30 V DC) - 16 mA
LED display	LED (red)

Utilization category

AC-15	3 A (24/110/230 V AC)
AC-1	8 A (24/110/230 V AC)
DC-13	1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC)

Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879027717
eClass	27371001
Packaging unit	1.000