

M12 Bu. D-cod. / RJ45 Ethernet adapter 0° 4-pol.

Ethernet CAT5

Control cabinet entry system

Female straight – female straight

M12 – RJ45, 4-pole

D-coded

shielded


suitable for sheet thickness 2.0...5.0 mm

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**


M12 RJ45

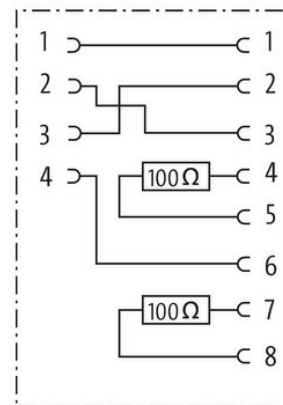



Female



Female



panel cut out

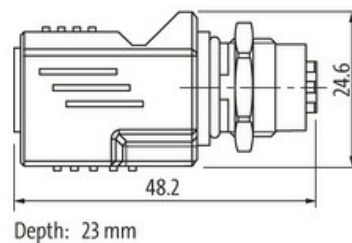

Product may differ from Image




Form

Form 44671

Technical Data

Operating voltage max. 60 V DC

Operating current per contact max. 1.76 A

Transfer parameters CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)

Transfer rate	up to 100 Mbit/s full duplex
Coding	M12, D-coded
Protection	IP68 (M12) - IP20 (RJ45)
Material	PUR
Locking material	Brass, chrome plated

General data

Temperature range	-25...+85 °C
Mounting plate thickness	2...5 mm

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879566896
eClass	27143423
Packaging unit	1.000