

Cube67 Valve-Interface, I/O Extension Module

DO32, MAC Valves, D-Sub HD44F 44 pol.,

Expansion module

Cube67 DO32 E - Valve

Multipole plug (0.5 A)


MAC - SUB-D44

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

[Link to Product](#)

Illustration

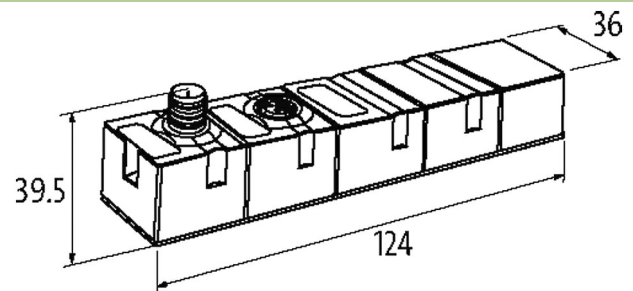

Product may differ from Image

General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+70 °C)
Protection	IP67
Dimensions H×W×D	124×36×39.5 mm

Output

Actuator supply UA	24 V DC (EN 61131-2)
Switching current per output	max. 0.5 A (short-circuit and overload protected)

Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 50 mA

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2× 4 A)
I/O ports	MAC - SUB-D44

Diagnostic

Communication status	via LED
Diagnostic via LED	per module
Diagnostic via BUS	per module and channel
Actuator warning	per channel via BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879048361

eClass	27242604
Packaging unit	1.000
