

**M12 MALE 0° WIREABLE SCREW TERM.**4-pol. max.0,75mm<sup>2</sup> 6-8mm

Male straight

M12, 4-pole

Screw terminals



Sealing range (cable Ø): 6...8 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

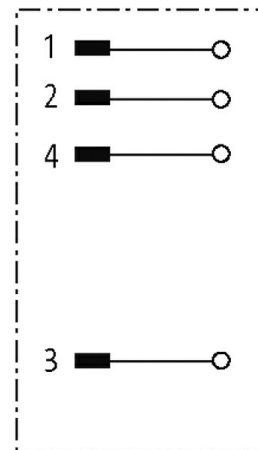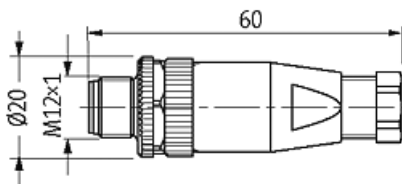

Product may differ from Image

**Form**

Form 12741

**Technical Data**

Operating voltage max. 250 V AC/DC

Operating current per contact max. 4 A

|                          |  |
|--------------------------|--|
| Connection cross section | max. 0.75 mm <sup>2</sup>  |
| Sealing range (cable Ø)  | 6...8 mm   |
| Locking of ports         | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Protection               | IP67 inserted and tightened (EN 60529)                           |

**General data**

|                   |              |
|-------------------|--------------|
| Temperature range | -40...+85 °C |
| Dimensions H×W×D  | 60×20×20 mm  |

**Commercial data**

|                       |               |
|-----------------------|---------------|
| country of origin     | DE            |
| customs tariff number | 85366990      |
| EAN                   | 4048879201643 |
| eClass                | 27279221      |
| Packaging unit        | 1             |