

M12 Xtreme male 0° / M12 female 0° A-cod.

PUR 4x0.5 bk UL/CSA+drag ch. 1.5m

Xtreme - Outdoor

Stainless steel 1.4305 (V2A)

Male straight – female straight

M12 – M12, 4-pole

Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


Further cable lengths on request.

Link to Product**Illustration**

| | | | |
|---|---|-------------|-----|
| 1 | ■ | brown (+) | C 1 |
| 2 | ■ | white (N/C) | C 2 |
| 4 | ■ | black (N/O) | C 4 |
| 3 | ■ | blue (-) | C 3 |

Male

Female

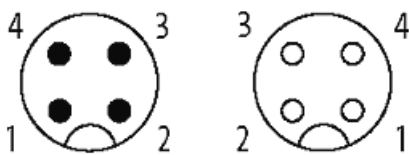

Product may differ from Image

Form

Form 40021

Technical Data

| | |
|-------------------------------|-------------------------|
| Operating voltage | max. 250 V AC/DC |
| Rated surge voltage | 2.5 kV |
| Operating current per contact | max. 4 A |
| No. of poles | 4-pole |
| Configuration | fully used |
| Material group | IEC 60664-1, category I |
| Coding | A-coded |

| | |
|---|--|
| LED display | no |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland | M12 (SW14) |
| Protection | IP65, IP66K, IP67, IP68 inserted and tightened (EN 60529) |
| Material | PUR |
| Locking material | Stainless steel 1.4305 (V2A) |
| suitable for corrugated tube (internal Ø) | 10 mm |

General data

| | |
|------------------|--------------------------|
| Standards | DIN EN 61076-2-101 (M12) |
| Mounting method | inserted, tightened |
| Pollution Degree | 3 |

Cables

| | |
|------------------------------------|--|
| No./diameter of wires | 4× 0.5 mm ² |
| Wire isolation | PP (br, wh, bl, bk) |
| C-track properties | 10 Mio. |
| Material (jacket) | PUR (UL/CSA) |
| Outer Ø | 4.9 mm ±5% |
| Bend radius (moving) | 10× outer Ø |
| Temperature range (fixed) | -40...+80 °C |
| Temperature range (mobile) | -25...+80 °C |
| Cable identification | 737 |
| Cable Type | 3 (PUR) |
| Approval (cable) | cURus (AWM-Style 20549/10493); CE conform |
| Cable weight [g/m] | 44,00 |
| Material (wire) | Cu wire, bare |
| Resistor (core) | max. 39 Ω/km (20 °C) |
| Single wire Ø (core) | 0.19 mm |
| Construction (core) | 28× 0.15 mm (multi-strand wire class 6) |
| Diameter (core) | 4× 0.5 mm ² |
| AWG | similar to AWG 20 |
| Material (wire isolation) | PP |
| Material property (wire isolation) | CFC-, halogen-, cadmium-, silicone- and lead-free |
| Shore hardness (wire isolation) | 70 ±5 D |
| Wire-Ø incl. isolation | 1.4 mm ±5% |
| Color/numbering of wires | br, bk, bl, wh |
| Stranding combination | 4 wires twisted |
| Shield | no |
| Material (jacket) | PUR |
| Material property (jacket) | CFC-, halogen-, cadmium-, silicone- and lead-free, matt, low-adhesion, machine easy to process, abrasion-resistant, hydrolysis and microbial resistant |
| Shore hardness (jacket) | 90 ±5 A |
| Outer-Ø (jacket) | 4.9 mm ±5% |
| Color (jacket) | black |
| chemical resistance | good resistance to oil, gasoline and chemicals (EN 60811-404) |
| thermal resistance | flame retardand UL 1581 Section 1090 (H), CSA FT2 / IEC 60332-2-2 |
| Nominal voltage | 300 V AC |
| Test voltage | 2500 V AC |
| Current load capacity | to DIN VDE 0298-4 |
| Temperature range (fixed) | -40...+80 °C, (+90 °C at max. 10 000 operating hours) |
| Temperature range (mobile) | -25...+80 °C, (+90 °C at max. 10 000 operating hours) |
| Bend radius (fixed) | 5× outer Ø |
| Bend radius (moving) | 10× outer Ø |
| No. of bending cycles (C-track) | max. 10 Mio. (25 °C) |

| | |
|------------------------|--------------------------|
| Travel speed (C-track) | max. 3 m/s |
| Acceleration (C-track) | max. 10 m/s ² |
| Torsion stress | ±180°/m |
| No. of torsion cycles | max. 2 Mio. (25 °C) |
| Torsion speed | 35 cycles/min |
| Jacket Color | black |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85444290 |
| EAN | 4048879305297 |
| eClass | 27279218 |
| Packaging unit | 1 |