


Modlight Illumix Classic Line C6W

LED machine lamp, IP67, 24VDC, 2xM12 connection

Modlight Illumix Classic Line C
6 W
expandability

Link to Product

Illustration

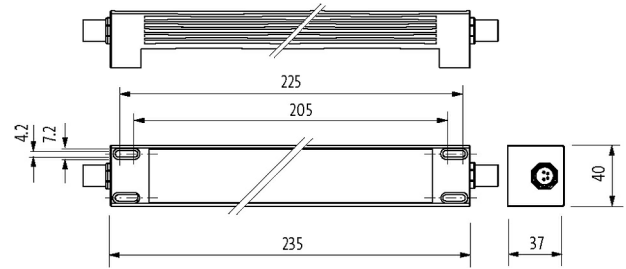

Product may differ from Image



Technical Data

Operating voltage	24 V DC (21.6...27.6 V DC)
No. of poles	4-pole
Coding	A-coded
Connection	M12 (male)
Luminaire light yield	approx. 105 lm/W
Luminaire light current	approx. 630 lm
Color reproduction (Ra)	> 80
Light color	Daylight white, approx. 5500 K
Lighting angle	> 120°
Input current	6 W

General data

Mounting method	rotatable
Temperature range	-30...+50 °C
Material (housing)	Anodized aluminum
Material (light cover)	diffuse single-pane safety glass (ESG), 4 mm
Installation altitude	Operation up to 2 000 m
Vibration stress	2...9 Hz/10 mm; 9...200 Hz/3 g
Screw head-Ø	max. 12 mm/M5
Relative humidity	5...95%
Protection	IP67
Dimensions HxWxD	37x235x40 mm (1.46x9.25x1.57 in)
Shock load	50 g, 11 ms

Commercial data

country of origin	DE
customs tariff number	94054239
EAN	4048879752428

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

eClass	27110306
Packaging unit	1.000
