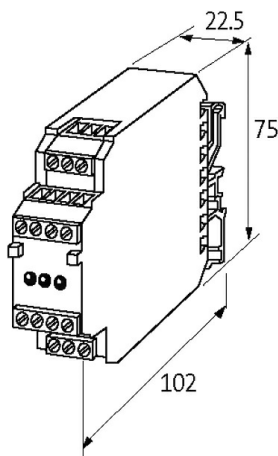
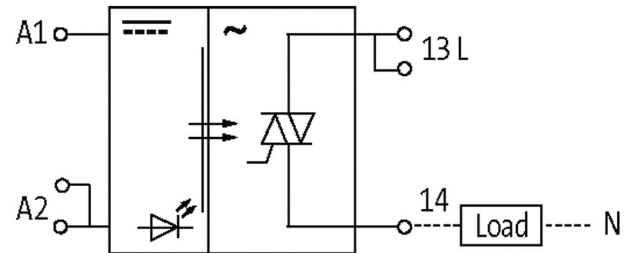


AMS 20-47/4 OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 250 VAC / 4 A

Triac 4 A

Control voltage 230 V AC on request

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	6.0 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	75x22.5x85 mm

Output

Leakage current (output is open)	max. 10 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.4 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 30/5 Hz (resist./ind.)
Switching current per output	10 mA...4 A

Input	
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (red)
Input current	10 mA
Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879028066
eClass	27371604
Packaging unit	1.000