

**MIRO 12.4 24V-2U INPUT RELAY**

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

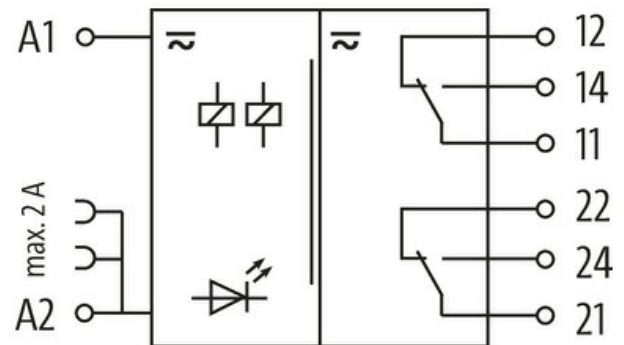
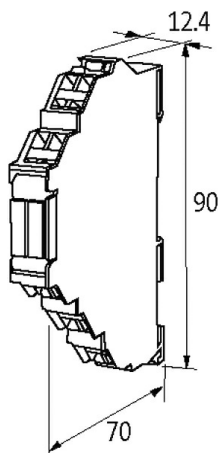
2 NO/NC contacts

6 A

24 V AC/DC

Spring clamp terminals

When the max. switching voltage/current is exceeded the gold plating is destroyed. The relay will then take on the properties of an output type.

[Link to Product](#)**Illustration**



Product may differ from Image



#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-25...+60 °C
Test isolation voltage	4 kV; safe separation (EN 60947-1)
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions H×W×D	90×12.4×65 mm

#### Output

Min. load current	1 mA (12 V DC)
Contact material	Ag Sn O <sub>2</sub> hv
Energize/release/contact bounce time	10/15/1.5 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 10 Hz
Switching current per output (Signal)	max. 20 mA
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A

#### Input

Connection voltage - current	24 V AC/DC (19.2...30 V AC/DC) - 20 mA
LED display	LED (green)

#### Utilization category

AC-15	3 A (24/110/230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

#### Commercial data

country of origin	CZ
customs tariff number	85364900
EAN	4048879022026
eClass	27371601
Packaging unit	1.000