

## CUBE67 I/O COMPACT MODULE

4 analog outputs (I)

Compact module

AO4 - (C) 4x M12 (I)



Current

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

### Link to Product

#### Illustration

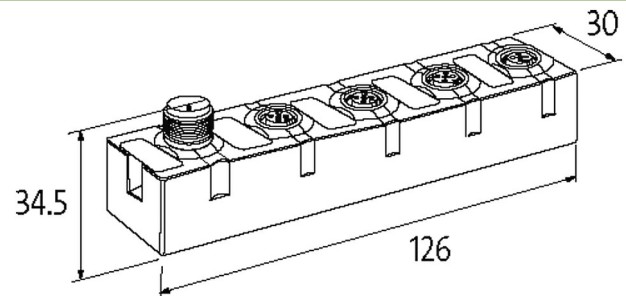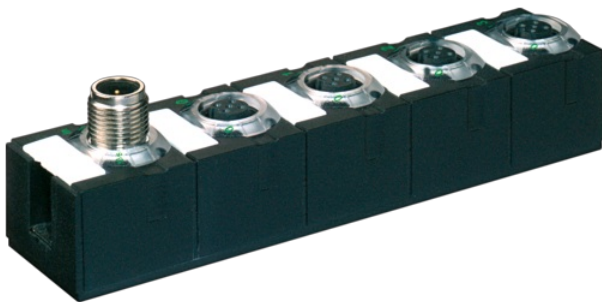

Product may differ from Image



#### General data

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions HxWxD	126x30x34.5 mm

#### Output

Supply voltage	24 V DC (EN 61131-2), via system connection (max. 4 A)
Resolution (analog)	11 Bit
Conversion time (analog)	approx. 1 ms (per channel)
Actuator supply UA	24 V DC (EN 61131-2), max. 1.6 A (M12 female), short-circuit and overload protected
Accuracy	max. ±0.5% (of range limit)

#### Internal communication

LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)
Current consumption	max. 50 mA

#### Current outputs

Input range	0...20 mA, 4...20 mA
Load	max. 500 Ω

#### Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2x 4 A)
I/O ports	M12 (female) 5-pole, A-coded

#### Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel

Diagnostic via BUS	per module and channel
Actuator warning	per channel via LED and BUS
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Wire break upper/lower limit overload	per channel via LED and BUS
Short-circuit and overload	yes
<b>Commercial data</b>	
country of origin	DE
customs tariff number	85389099
EAN	4048879048231
eClass	27242601
Packaging unit	1.000