

M12 ADAPTOR ON TOP / MSUD VALVE PLUG FORM CI 9.4 MM

Form CI (9.4 mm) – M12, connector top entry

24 V AC $\pm 20\%$ / DC $\pm 25\%$

LED and suppression


3-pole

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

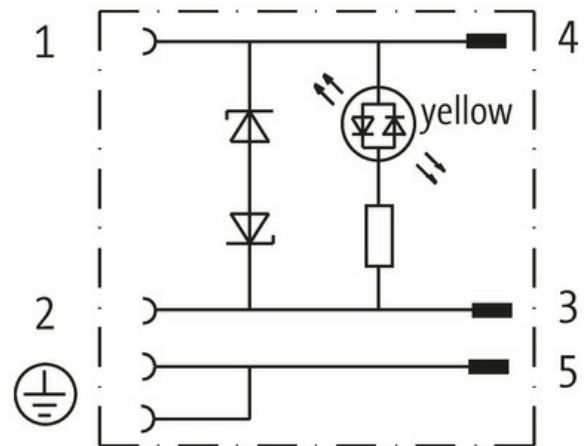

Female



Male

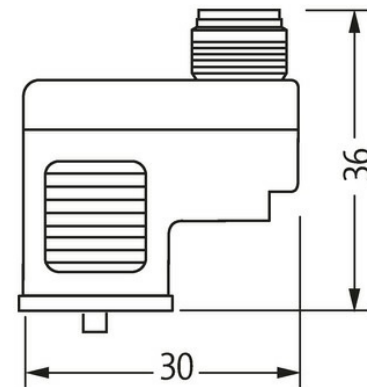

Depth: 15 mm

Product may differ from Image



Form

Form 42851

Technical Data

Operating voltage 24 V AC $\pm 20\%$ / DC $\pm 25\%$

Operating current per contact max. 4 A

Current consumption max. 15 mA

Switch off peak	max. 55 V
Locking of ports	M3/M12×1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Configuration	2 contacts + bridged PE

General data

Temperature range	-25...+85 °C
-------------------	--------------

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879348720
eClass	27143423
Packaging unit	1.000