


Modlink MSDD-set: Frame 4000-68123-0000000,

insert 4000-68000-0020000 + 4000-68000-0020000

Link to Product

Illustration

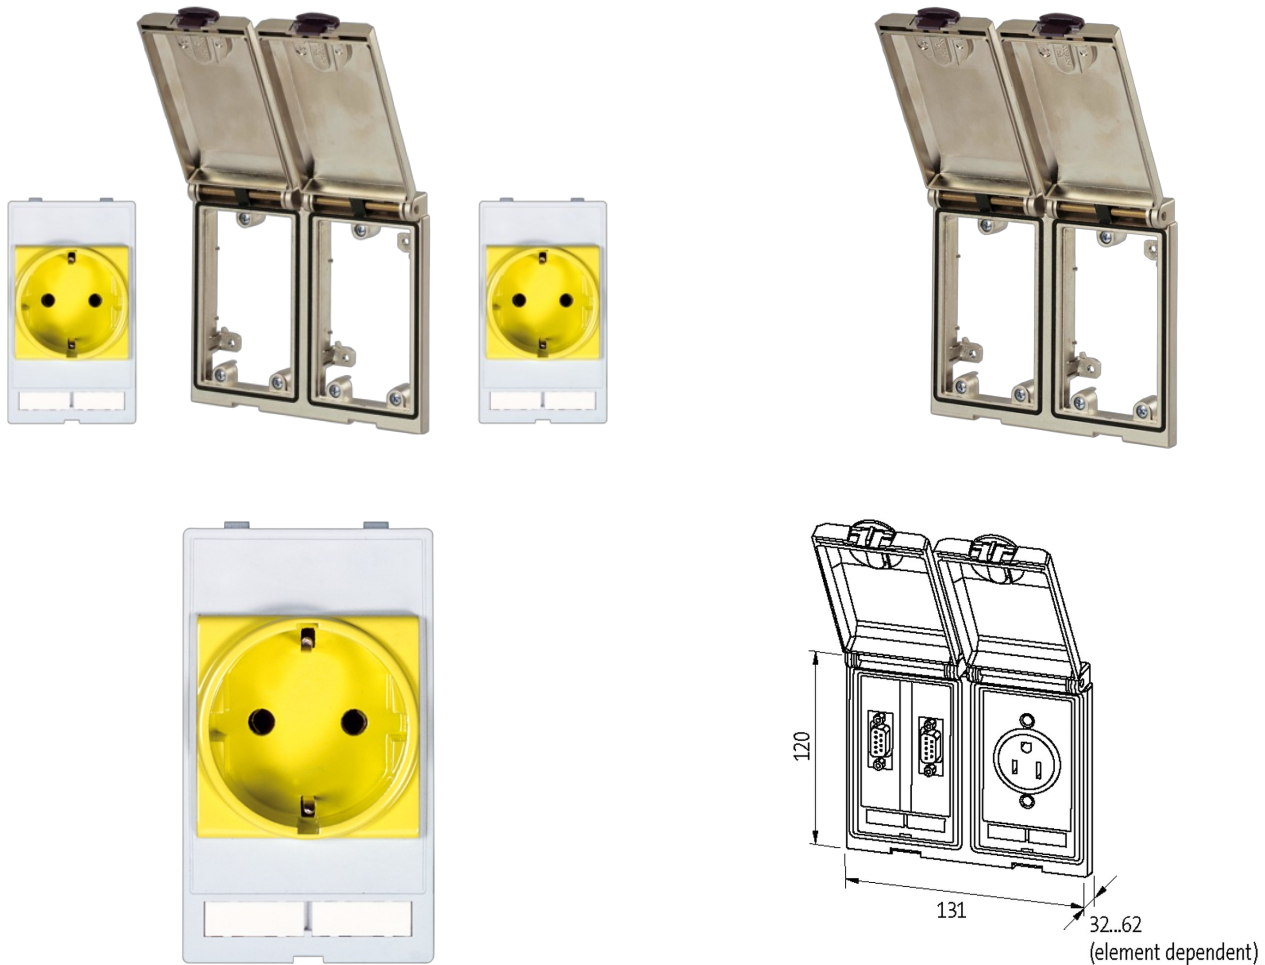

Product may differ from Image

Frame

| | |
|---|---|
| suitable for mounting with wall thickness | 1...5 mm |
| Protection | IP65 |
| Temperature range | -10...+60 °C (storage temperature -25...+60 °C) |
| Housing | Zinc die-casting, with surface finishing |

Germany (VDE)

| | |
|-------------------|---|
| Connection | Screw terminals: max. 2× 6 mm ² (AWG 10) |
| Operating voltage | 250 V AC |
| No. of poles | 2 + PE |
| Operating current | 16 A |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85389099 |
| EAN | 4048879034982 |

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|----------------|----------|
| eClass | 27189217 |
| Packaging unit | 1.000 |
