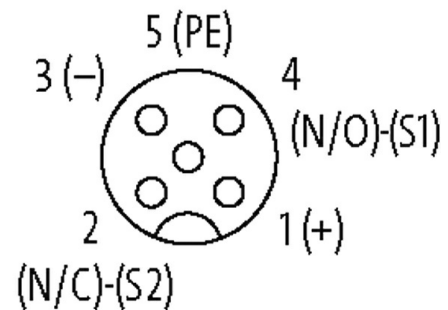


M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED

MVC8-UE10.0-XA 10m PVC-CNOMO-cable 16x0,34/3x1

8-way, 5-pole
 PVC (CNOMO)
 10.0 m
 without LED, up to 125 V AC/DC
 Further cable lengths on request.

[Link to Product](#)**Illustration****M12 Females 5-pole**

Product may differ from Image

Technical Data

| | |
|-------------------------------|-------------------------|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 4 A |
| Locking of ports | Screw thread (M12x1 mm) |
| Signal per port | 2 |
| Total current | max. 10 A |

General data

| | |
|-------------------|--|
| Temperature range | -20...+80 °C |
| Protection | IP67 inserted and tightened (EN 60529) |
| Dimensions HxWxD | 127x54x29 mm |

Cables

| | |
|-----------------------|-----------------------------------|
| No./diameter of wires | 16x 0.34 + 3x 1.0 mm ² |
| Outer Ø | 11.0 mm ±5% |
| Bend radius (moving) | 15x outer Ø |
| Material (jacket) | PVC |

Contact Layout

| | |
|-------|-----------|
| PIN 1 | (+) |
| PIN 2 | (NC)/(S2) |
| PIN 3 | (-) |
| PIN 4 | (NO)/(S1) |
| PIN 5 | (Earth) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85444290 |
| EAN | 4048879062299 |

| | |
|----------------|----------|
| eClass | 27279219 |
| Packaging unit | 1.000 |
