

## Gateway CC-Link/AS-i, 1 Master, P24

Spec. 3.0, Power 24

AS-Interface/CC-Link  
Gateway-Singlemaster  
Power 24V

Specification 3.0


AS-Interface data decoupling integrated

Current manuals, GSD/type data can be downloaded at: [www.murrelektronik.com](http://www.murrelektronik.com)

Other gateways on request.

### Link to Product

#### Illustration

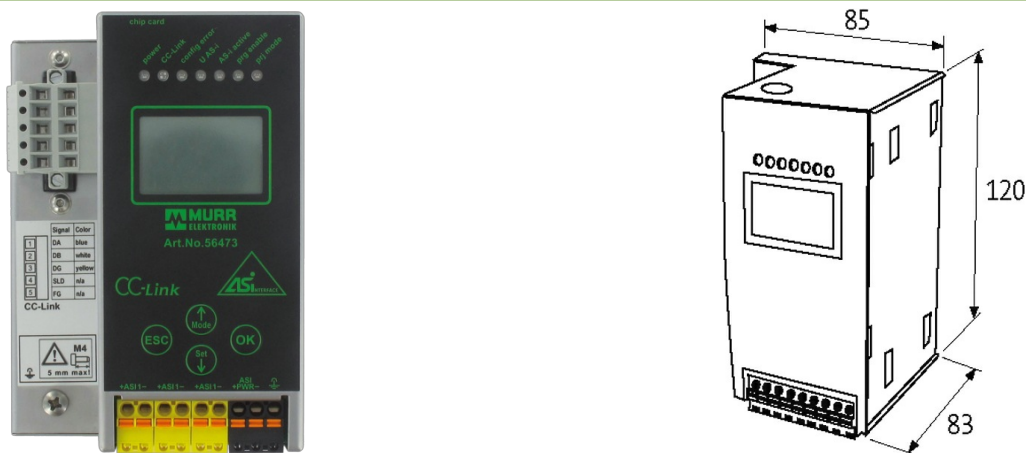

Product may differ from Image



#### General data

Standards	EN 61131-2, EN 62026-2, EN 61000-6-2, EN 61000-6-4
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+55 °C (storage temperature -25...+85 °C)
Test isolation voltage	min. 500 V
Protection	IP20
Dimensions HxWxD	120x85x83 mm

#### Fieldbus

Transfer rate	156 kbps...10 Mbps
Type	CC-Link

#### AS-Interface

Operating current	max. 250 mA (AS-Interface)
Serial interface/diagnostic	no
Cycle time	150 µs × (number of slaves + 2)
Bus connection	via pluggable spring clamp plug-in terminals on the front 0.5...1.5 mm <sup>2</sup>
No. of slaves	max. 62
Specification	3.0
Operating voltage	24 V DC (20...30.6 V DC - PELV)

**Functions**

-	Gateway-Singlemaster
-	AS-Interface duplicate address detection
-	AS-Interface data decoupling integrated
-	AS-Interface EMC detector integrated

**Connections**

Fieldbus	CC-Link specification
----------	-----------------------

**Commercial data**

country of origin	DE
customs tariff number	85176200
EAN	4048879661683
eClass	27242608
Packaging unit	1.000