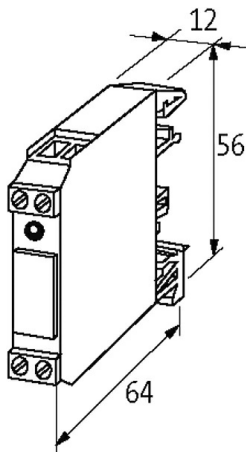
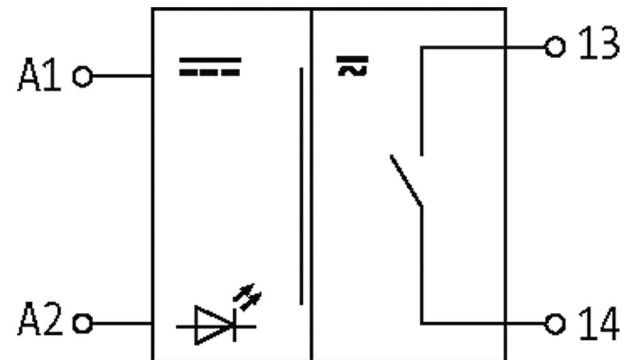


RMM 11/24VDC OUTPUT RELAY

IN: 24 VAC/DC - OUT: 250 VAC/DC / 5 A

1 relay; 1 NO contact
 5 A
 24 V DC
 LED (green)
 Screw terminals
 VW Id.Nr.:1232252

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	4.0 kV
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions H×W×D	56×12×65 mm

Output

Min. load current	100 mA
Contact material	Ag Ni 0.15 hv; Ag hv
Energize/release/contact bounce time	10/15/1.5 ms

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Switching voltage	max. 250 V AC/DC
-------------------	------------------

Switching frequency	max. 10 Hz
---------------------	------------

Power rating (voltage dependent)	max. 1250 VA/240 W
----------------------------------	--------------------

Switching current per output	max. 5 A
------------------------------	----------

Input

Connection voltage - current	24 V AC/DC (19.2...30 V AC/DC) - 15 mA
------------------------------	--

LED display	LED (green)
-------------	-------------

Utilization category

AC-15	3 A (24/110/230 V AC)
-------	-----------------------

AC-12	6 A (24/110/230 V AC)
-------	-----------------------

DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
-------	---

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879024891
-----	---------------

eClass	27371601
--------	----------

Packaging unit	1.000
----------------	-------