

7/8" MALE 90° FIELD-WIREABLE SCREW

5-pol. clamp section 6-8,7mm

Male 90°

7/8" (5-pole)




Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

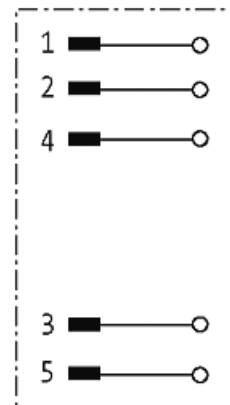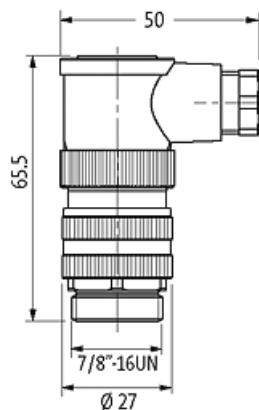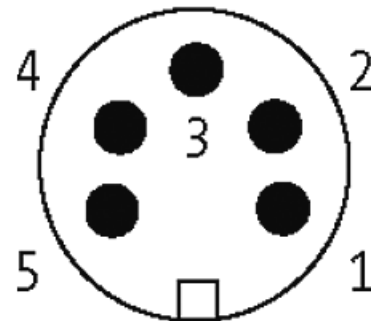

Product may differ from Image

**Form**

Form 78141

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 1.5 mm ²
Sealing range (cable Ø)	6...8.7 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing

Protection IP67 inserted and tightened (EN 60529)

General data

Temperature range -25...+85 °C

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879134750
eClass	27279218
Packaging unit	1