

**EXACT12, 8XM12, 5-POLE, BASIC HOUSING, W.O. LED'S**

Without homerun-cable

8-way, 5-pole



without LED, up to 125 V AC/DC

Screw plug-in terminals



Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.

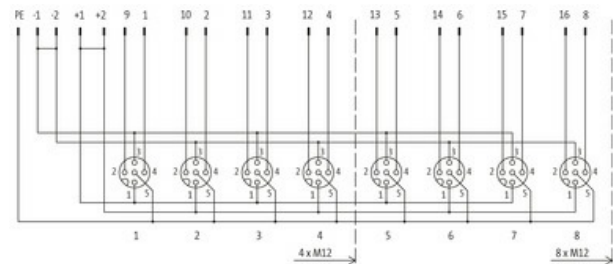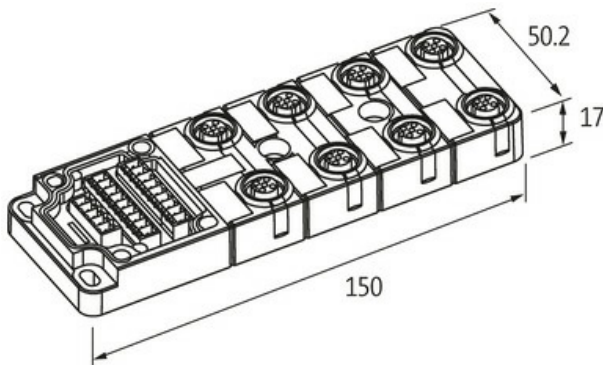**[Link to Product](#)****Illustration**

M12-Females 5-pole

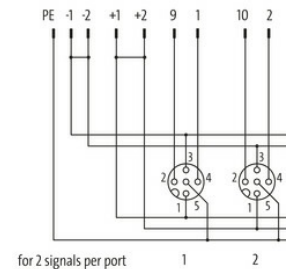

Product may differ from Image

**Technical Data**

Operating voltage	125 V AC/DC
Operating current per contact	max. 4 A
Protection	IP65/IP67
Housing	Plastic, flame retardant
Total current	max. 8 A

**General data**

Temperature range	-20...+70 °C
-------------------	--------------

**Contact Layout**

PIN 1	(+)
-------	-----

PIN 2	(NC)/(S2)
PIN 3	(-)
PIN 4	(NO)/(S1)
PIN 5	(Earth)

**Commercial data**

country of origin	DE
customs tariff number	85369010
EAN	4048879054041
eClass	27143423
Packaging unit	1.000