




BUS TERMINATING PLUG FOR PROFIBUS

M12 female 0°, b-cod. with termination resistor

PROFIBUS
Terminating resistor
Female
M12, 4-pole
B-coded

[Link to Product](#)**Illustration**

Female

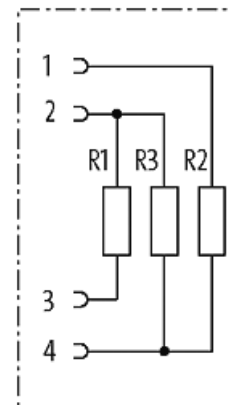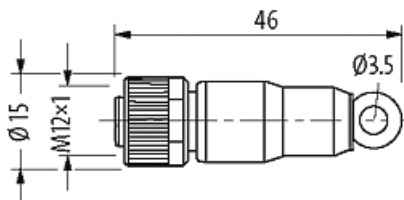

Product may differ from Image



DeviceNet™

Form

Form 14091

Technical Data

Operating voltage	max. 30 V DC
Operating voltage (only UL listed)	max. 30 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

