

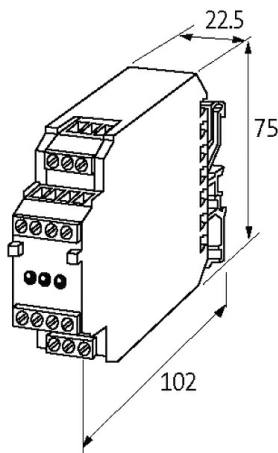
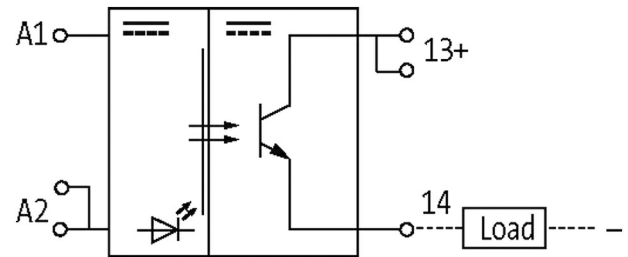
AMS 10-43/5 OPTO-COUPLER MODULE

N: 53 VDC - OUT: 53 VDC / 4 A

Transistor 4 A

24 V DC

Control voltage 230 V AC on request

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	75x22.5x85 mm

Output

Switching time ON/OFF	4/7 µs
Saturation voltage (across output)	max. 1.5 V DC
Switching voltage	4.5...53 V DC
Switching frequency	max. 2 kHz/4 Hz (resist./ind.)
Switching current per output	10 mA...4 A

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Input	
Voltage range OFF	0...3 V DC
Voltage range ON	10...53 V DC
LED display	LED (red)
Input current	14.5 mA
Commercial data	
country of origin	CZ
customs tariff number	85414900
EAN	4048879028028
eClass	27371604
Packaging unit	1.000