

MVP12, 8XM12, 4POLE, PLUG. CAP SCT.

Plug. cap, field-wireable via screw terminals

8-way, 4-pole


Screw plug-in terminals

Potential separation as option



with LED for digital PNP-signals 24 V DC

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

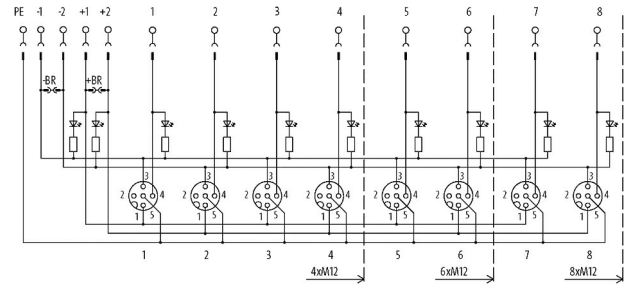Link to Product**Illustration**

M12 Females 4-pole



for 2 signals per port

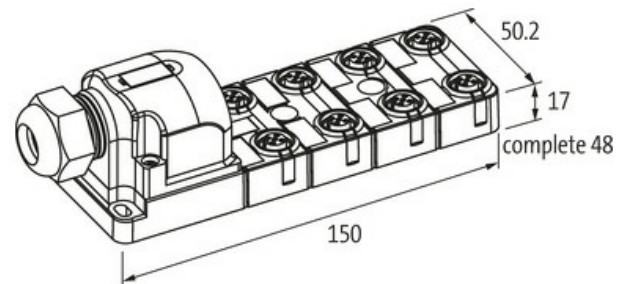

Product may differ from Image

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 4 A
Locking of ports	Screw thread (M12×1 mm)
Connection	Screw plug-in terminals: max. 1.5 mm ² (AWG 16)
Protection	IP67 inserted and tightened (EN 60529)
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 2× 8 A

General data

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Temperature range	-20...+80 °C
Dimensions H×W×D	150×50.2×17 mm

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879063258
eClass	27279219
Packaging unit	1.000