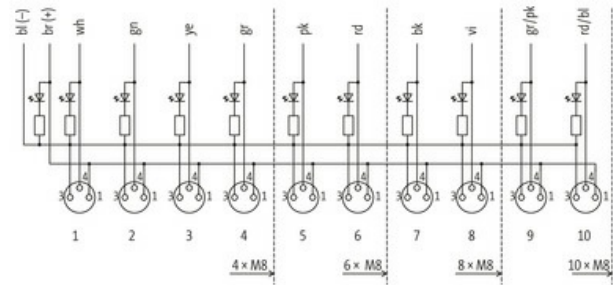


**EXACT8, 10XM8, 3 POLE PRE-WIRED CABLE**


5.0m PUR/PVC 10\*0,34+2\*0,75

PUR/PVC


5.0 m

[Link to Product](#)**Illustration**

M8-Females 3-pole



for 1 signal per port

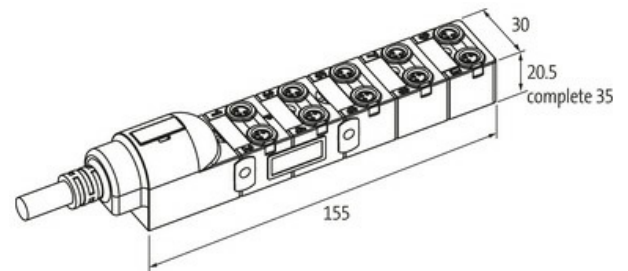

Product may differ from Image

**Form**

Form 80010

**Technical Data**

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Locking of ports	Screw thread (M8x1 mm)
Protection	IP65/IP67
Housing	Plastic, flame retardant
Signal per port	1 - (31-32)
Total current	max. 8 A

**General data**

Temperature range -20...+80 °C, depending on cable quality

**Cables**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

No./diameter of wires	10× 0.34 + 2× 0.75 mm <sup>2</sup>
Wire isolation	PVC (br, bl, wh, gn, pk, ye, bk, gr, rd, vi, grp, rdbl)
C-track properties	2 Mio.
Outer Ø	8.3 mm ±5%
Cable number	385
Color (jacket)	gray
Jacket Color	gray
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR/PVC

#### Contact Layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
	LED (green): Power / LED (yellow): (S1)

#### Commercial data

country of origin	DE
customs tariff number	85444290
EAN	4048879056953
eClass	27279219
Packaging unit	1.000