

## MST single phase safety transformer

P: 250VA IN: 208...550VAC OUT: 24VAC

Single-phase - Control and Isolation Transformers



250 VA

Isolation class T 40/B

Other voltages on request.

### [Link to Product](#)

#### Illustration

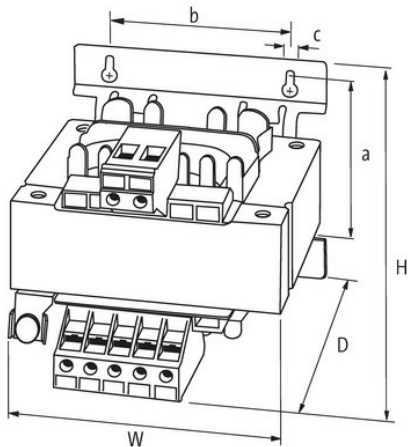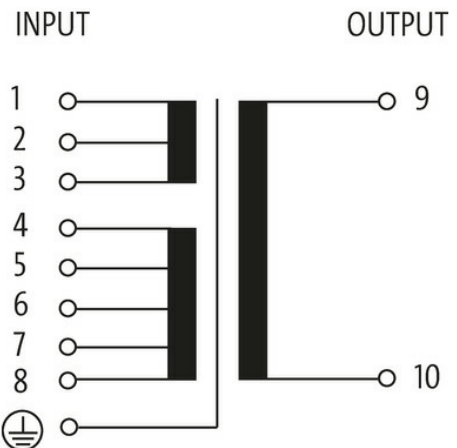

Product may differ from Image



#### General data

Standards	EN 61558-1, EN 61558-2-6, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -20...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8x10 mm
Fixing centers a×b×c	74.4×90×5.8 mm

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Dimensions H×W×D 98×120×134 mm

**Output**

Output voltage 24 V AC

Output rating 250 VA

**Input**

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 25 A (208 V AC); 9.3 A (550 V AC)

Short-circuit current 23 A (208 V AC); 8.7 A (550 V AC)

Input current 1.35 A (208 V AC); 0.51 A (550 V AC)

Frequency 50...60 Hz

**Commercial data**

country of origin CZ

customs tariff number 85043180

EAN 4048879437943

eClass 27031302

Packaging unit 1.000