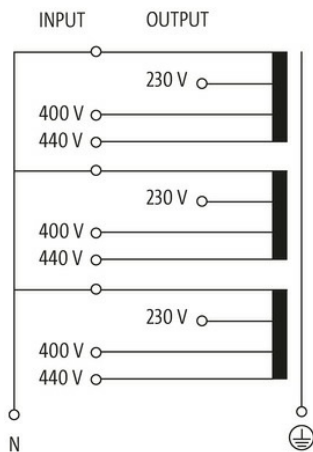


MDST THREE-PHASE AUTOTRANSFORMER

P:5200VA IN:3x400/440VAC OUT:3x230VAC

Autotransformer
5 200 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	3.0 kV
Drill hole Ø	18×10 mm
Fixing centers a×b×c	125×190×10 mm
Dimensions H×W×D	206×240×152 mm

Output

Output voltage	3× 230 V AC
Output rating	5 200 VA

Input

Input voltage	3× 400/440 V AC
Inrush current	52 A (400 V AC)
Short-circuit current	657 A (400 V AC)
Input current	7.7 A (400 V AC); 7 A (440 V AC)
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85043200
EAN	4048879073806
eClass	27031301
Packaging unit	1.000