


M12 MV insert shielded male / female snap


Insert - stationary housing
 Male straight – female straight
 M12, 5-pole
 A-coded

[Link to Product](#)



Illustration

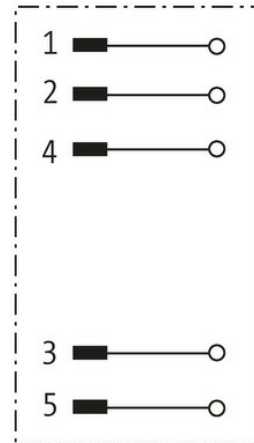

Male

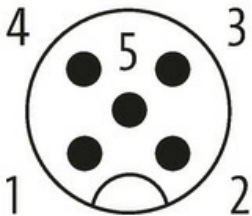

Female

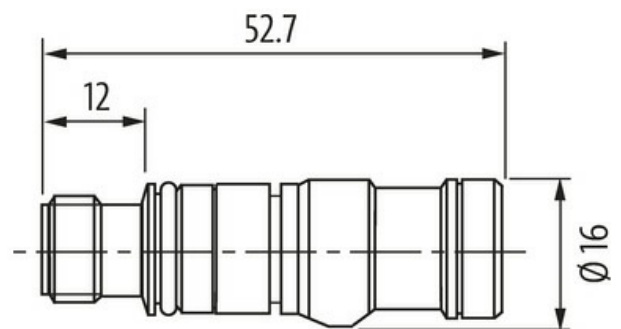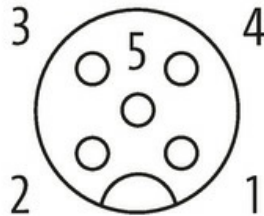

Product may differ from Image

Form

Form 42114

Technical Data

| | |
|-------------------------------|--|
| Operating voltage | 49 V AC/DC |
| Operating current per contact | max. 4 A |
| Coding | A-coded |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Compression gland | M12 |
| Protection | IP65 and IP67 when plugged and screwed down (EN 60529) |
| Material | Brass, nickel plated |

General data

| | |
|------------------------|--------------|
| Temperature range | -25...+85 °C |
| Test isolation voltage | 1.5 kV |
| Gasket | FKM |

Commercial data

country of origin DE

| | |
|-----------------------|---------------|
| customs tariff number | 85366990 |
| EAN | 4048879562805 |
| eClass | 27260702 |
| Packaging unit | 1.000 |