

M12 FEMALE 0° SELF WIREABLE SCREW TERMINAL5-pol. 0,14 - 1,5mm², 2,5-8mm cable diameter

AIDA conform

Female straight

M12, 5-pole

Screw terminals




Sealing range (cable Ø): 4...8 mm

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female

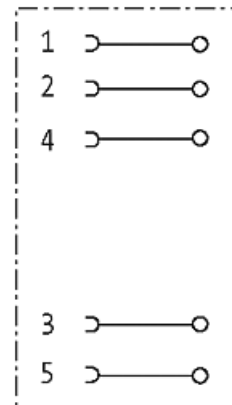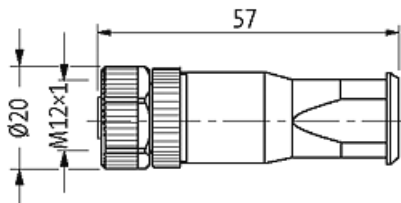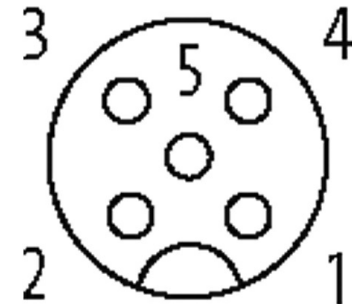

Product may differ from Image

Form

Form 12931

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category III
Coding	A-coded
Sealing range (cable Ø)	4...8 mm
Locking of ports	Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing
Protection	IP67 inserted and tightened (EN 60529)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Material PA

General data

Pollution Degree	3
Temperature range	-30...+85 °C
Material (gasket)	FKM

Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879661898
eClass	27279221
Packaging unit	1