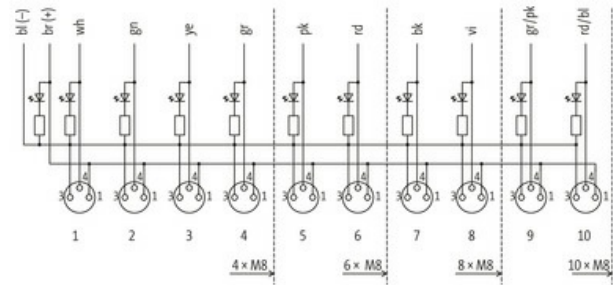


EXACT8, 4XM8, 3 POLE PRE-WIRED CABLE



3.0m PUR/PVC 4*0,34+2*0,75

PUR/PVC

3.0 m

[Link to Product](#)**Illustration**

M8-Females 3-pole

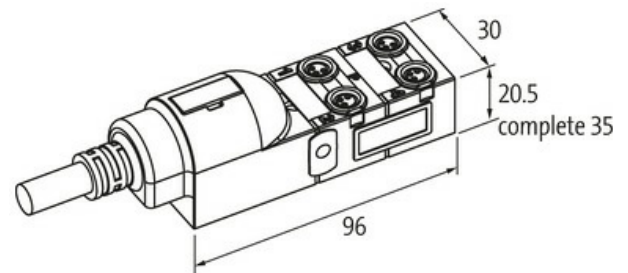

Product may differ from Image

**Form**

Form 84010

Technical Data

| | |
|-------------------------------|--------------------------|
| Operating voltage | 24 V DC |
| Operating current per contact | max. 2 A |
| Locking of ports | Screw thread (M8x1 mm) |
| Protection | IP65/IP67 |
| Housing | Plastic, flame retardant |
| Signal per port | 1 - (31-32) |
| Total current | max. 8 A |

General data

Temperature range -20...+80 °C, depending on cable quality

Cables

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

| | |
|----------------------------|-----------------------------------|
| No./diameter of wires | 4× 0.34 + 2× 0.75 mm ² |
| Wire isolation | PVC (br, bl, ye, wh, gn, gr) |
| C-track properties | 2 Mio. |
| Outer Ø | 6.9 mm ±5% |
| Cable number | 337 |
| Color (jacket) | gray |
| Jacket Color | gray |
| Temperature range (fixed) | -30...+80 °C |
| Temperature range (mobile) | -5...+60 °C |
| Bend radius (fixed) | 5× outer Ø |
| Bend radius (moving) | 10× outer Ø |
| Material (jacket) | PUR/PVC |

Contact Layout

| | |
|-------|---|
| PIN 1 | (+) |
| PIN 3 | (-) |
| PIN 4 | (NO)/(S1) |
| | LED (green): Power / LED (yellow): (S1) |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85444290 |
| EAN | 4048879056540 |
| eClass | 27279219 |
| Packaging unit | 1.000 |