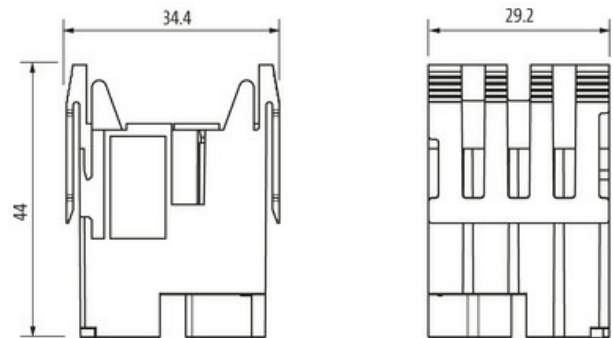


Shielded male module, 2-pole

50 V, 10 A

Male
2-pole
Koax

Technical data will be only guaranteed with Murrelektronik components.

[Link to Product](#)**Illustration**

Product may differ from Image

Technical Data

No. of poles	2
Material group	I
Mating cycles	min. 500

General data

Pollution Degree	3
Temperature range	-40...+125 °C
No. of module positions	2
Flammability class	V-0 (acc. to UL 94)
Type	Male
Climatic category	40/125/10
Material (module)	PA GF
Dimensions HxWxD	44x29.2x34.4 mm

Cables

Current load capacity	see derating curve
-----------------------	--------------------

Commercial data

country of origin	CZ
customs tariff number	85389099
EAN	4048879641845
eClass	27143424
Packaging unit	5.000