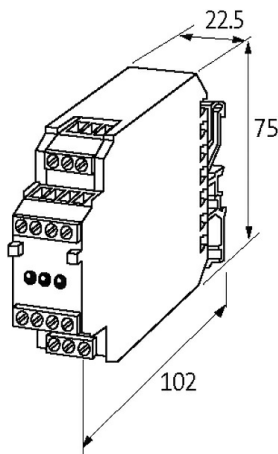
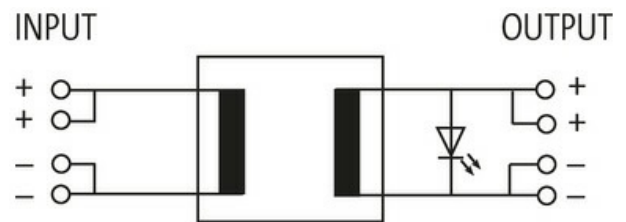


**MDD DC/DC-CONVERTOR SWITCH MODE**

IN: 24VDC OUT: 12V/0,7ADC

INPUT: 24 V DC  
 OUTPUT: 12 V DC  
 Output rating: 8 W  
 Current: 0.7 A

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61204-3
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+50 °C, no condensation
Test isolation voltage	4 kV (input/output)

**Output**

Output voltage	12 V DC (SELV), ±2%
Output fuse	short-circuit and overload protected, restart after overload by removing power supply
Output current	max. 0.7 A
Ripple	max. 0.2% eff/rms

**Input**

The information in this brochure has been compiled with the utmost care.  
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Input voltage	24 V DC
Input fuse (external)	2 A (T)
Input current	0.6 A
Input fuse (internal)	1.5 A (T)

**Commercial data**

country of origin	CZ
customs tariff number	85043121
EAN	4048879079549
eClass	27210901
Packaging unit	1.000