



MIRO 6.2MM OPTO-COUPLER MODULE WITH ISOLATION LINK

IN: 53 VDC - OUT: 250 VAC / 0,5A

Triac 0.5 A
24 V DC
Spring clamp terminals

[Link to Product](#)

Illustration

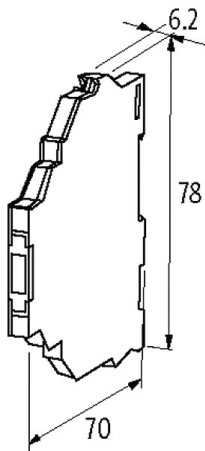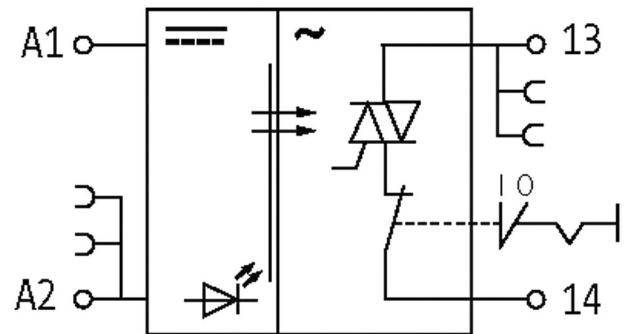

Product may differ from Image

General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

Output

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	24...250 V AC
Switching frequency	max. 20/1 Hz (resist./ind.)

Switching current per output 2 mA...0.5 A

Input

Control current 7 mA

Voltage range OFF 0...5 V DC

Voltage range ON 10...53 V DC

LED display LED (yellow)

Commercial data

country of origin CZ

customs tariff number 85414900

EAN 4048879021685

eClass 27371601

Packaging unit 1.000