

**RMMDH-AK 11/24 WITH TOGGLE SWITCH**

IN: 24 VDC - OUT: 250 VAC/DC / 3 A

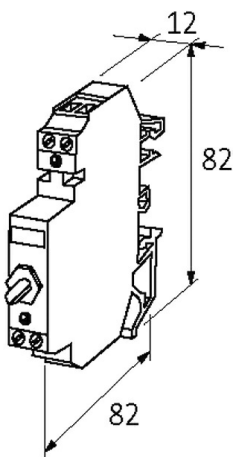
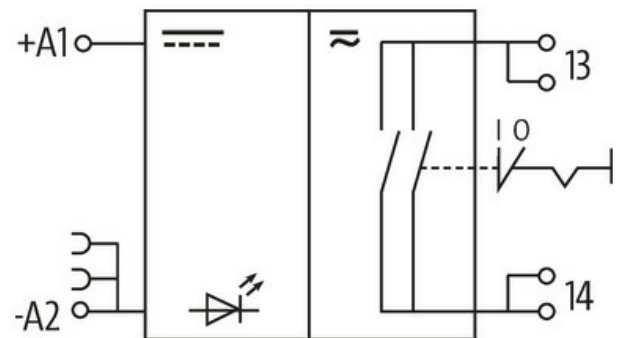
1 relay; 1 NO contact

3 A

24 V DC

with minus plug link

Toggle switch for bridging the NO contact

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+50 °C
Test isolation voltage	3.0 kV
Mech./ elect. life	30 000 000 switching cycles/load dependent
Dimensions H×W×D	82×12×68 mm

**Output**

Min. load current	100 mA
Contact material	Ag Cd 0
Energize/release/contact bounce time	10/10/2 ms

Switching voltage	max. 250 V AC/DC
Switching frequency	max. 15 Hz
Power rating (voltage dependent)	max. 750 VA/90 W
Switching current per output	max. 3 A

**Input**

Plug link (supplied)	Art-No. 90960
Connection voltage - current	24 V DC (19.2...28 V DC) - 10 mA
LED display	LED (red)

**Utilization category**

AC-15	3 A (24/110/230 V AC)
AC-1	3 A (24/110/230 V AC)
DC-13	1.5 A (24 V DC); 0.3 A (110 V DC); 0.15 A (230 V DC)

**Commercial data**

country of origin	CZ
customs tariff number	85364900
EAN	4048879027809
eClass	27371001
Packaging unit	1.000