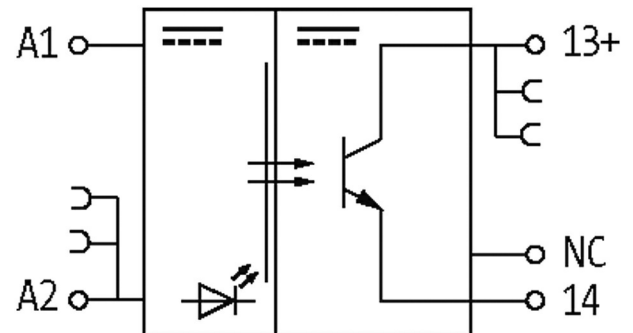



MIRO TR 24VDC FK 2A 5P OPTO-COUPLER MODULE

IN: 53 VDC - OUT: 48 VDC / 2 A

Transistor 2 A
24 V DC
Inrush current limiting
with solder terminal
Spring clamp terminals

[Link to Product](#)**Illustration**

common return for NC

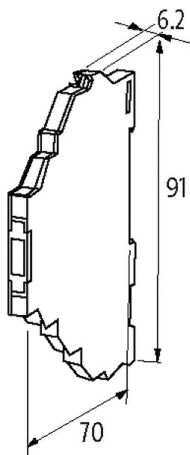

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	91x6.2x70 mm

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Output

Leakage current (output is open)	max. 0.1 mA
Switching time ON/OFF	5/10 ms
Saturation voltage (across output)	max. 0.35 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 10 Hz
Switching current per output	1 mA...2 A (overload protected)

Input

Control current	6 mA
Voltage range OFF	0...5 V DC
Voltage range ON	10...53 V DC
LED display	LED (yellow)

Commercial data

country of origin	CZ
customs tariff number	85414900
EAN	4048879021784
eClass	27371601
Packaging unit	1.000