


MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 630VA IN: 240-415VAC OUT: 110-110-20VAC

Single-phase - Control and Isolation Transformers
630 VA
Spring clamp terminals
Isolation class T 60/B

[Link to Product](#)

Illustration

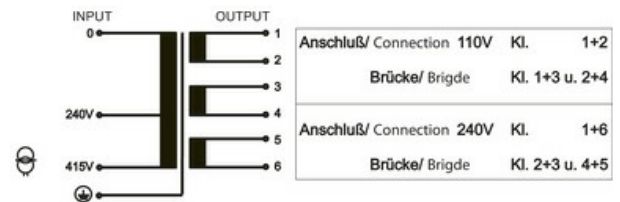

Product may differ from Image



General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	7×11 mm
Fixing centers a×b×c	107.5×122×7 mm

Dimensions H×W×D 129×150×148 mm

Output

Output voltage 110/240 V AC
Output rating 630 VA

Input

Input voltage 240/415 V AC
Inrush current 75.6 A (240 V AC); 43.4 A (415 V AC)
Short-circuit current 82.3 A (240 V AC); 47.7 A (415 V AC)
Input current 2.98 A (240 V AC); 1.71 A (415 V AC)
Frequency 50...60 Hz

Commercial data

country of origin CZ
customs tariff number 85043180
EAN 4048879066457
eClass 27031302
Packaging unit 1.000