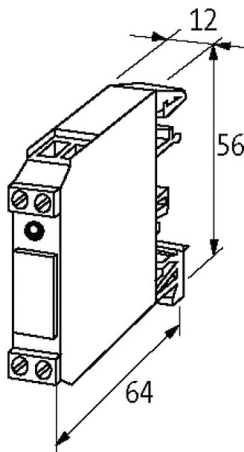
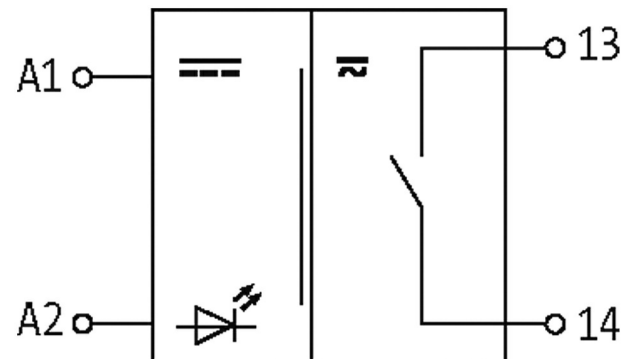


**RMME 11/230 AC INPUT RELAY**

IN: 230 VAC/DC - OUT: 125 VAC/DC / 1 A

1 relay; 1 NO contact  
 1 A  
 230 V AC  
 Screw terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	1.5 kV
Mech./ elect. life	100 000 000 switching cycles/load dependent
Dimensions HxWxD	56x12x64 mm

**Output**

Min. load current	1 mA
Contact material	Pd Ni-Au Rh
Energize/release/contact bounce time	10/10/1 ms
Switching voltage	max. 125 V AC/DC

Switching frequency	max. 15 Hz
Power rating (voltage dependent)	max. 60 VA/30 W
Switching current per output	max. 1 A
<b>Input</b>	
Connection voltage - current	230 V AC (195...253 V AC) - 6 mA
LED display	LED (yellow)
<b>Utilization category</b>	
AC-15	0.25 A (50 V AC)
AC-12	0.5 A (50 V AC)
<b>Commercial data</b>	
country of origin	CZ
customs tariff number	85364900
EAN	4048879027540
eClass	27371001
Packaging unit	1.000