

M12 male 0° shielded field-wireable B-cod.

PROFIBUS

Male straight

M12, 5-pole

B-coded



shielded

Screw terminals

Sealing range (cable Ø): 4...6 mm

[Link to Product](#)**Illustration**

Male

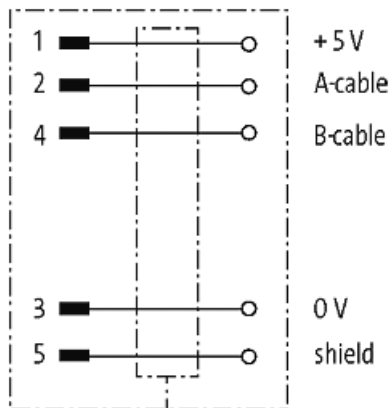

Product may differ from Image

Form

Form 14002

Technical Data

Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	4...6 mm
Protection	IP67 inserted and tightened (EN 60529)
Housing	Brass, nickel plated

General data

Temperature range -40...+85 °C, depending on cable quality

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879622851
eClass	27279221
Packaging unit	1