MURR ELEKTRONIK
stay connected

MIRO 6.2 OUTPUT RELAY WITH TOGGLE SWITCH

IN: 24 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO contact
6 A
24 V AC/DC
with protected H-O-A toggle switch
Screw terminals
LED (green)

Link to Product

Illustration

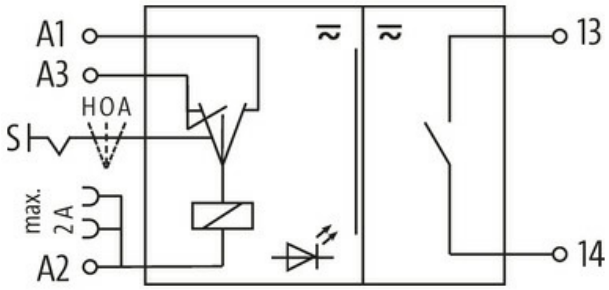

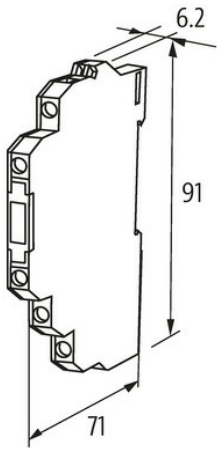

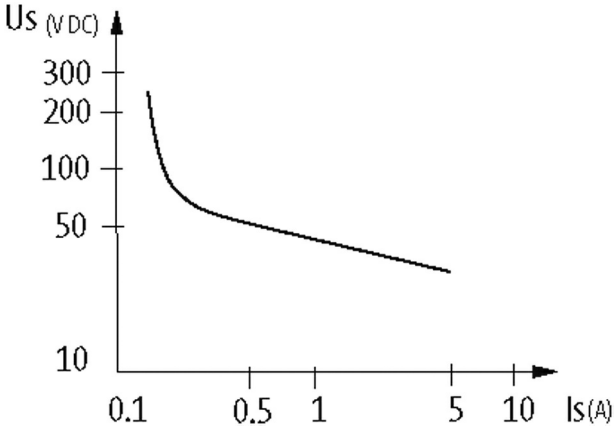

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

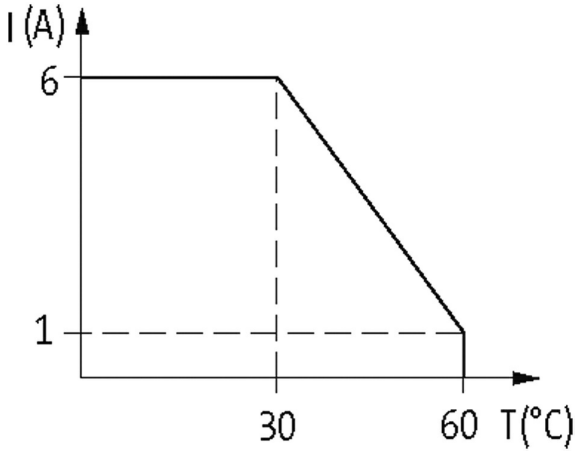

Product may differ from Image

General data	
Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+55 °C
Test isolation voltage	4 kV; safe separation (EN 60947-1)
Mech./ elect. life	20 000 000 switching cycles/load dependent
Dimensions H×W×D	91×6.2×71 mm
Output	
Min. load current	100 mA (12 V DC)
Contact material	Ag Sn O2
Energize/release/contact bounce time	10/15/1.5 ms
Switching voltage	max. 250 V AC/DC
Switching frequency	max. 10 Hz
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching current per output	max. 6 A
Input	
Connection voltage - current	24 V AC/DC (19.2...30 V AC/DC) - 17 mA
LED display	LED (green)
Utilization category	
AC-15	3 A (24/110/230 V AC)
AC-12	6 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)
Commercial data	
country of origin	CZ
customs tariff number	85364900
EAN	4048879027243
eClass	27371001
Packaging unit	1.000

The information in this brochure has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22