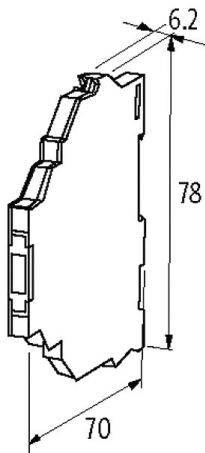


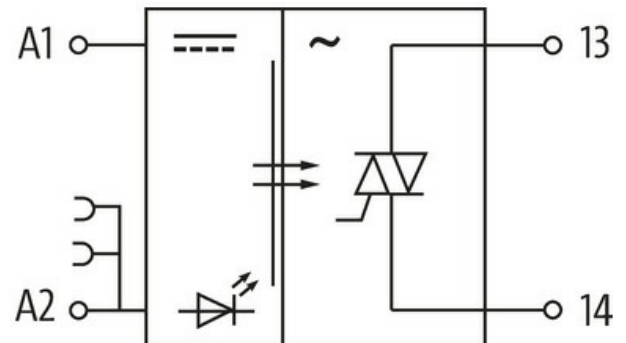
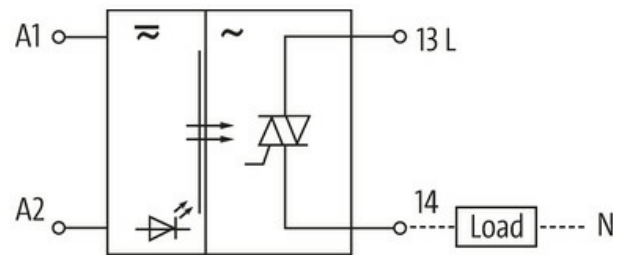
**MIRO TH 230VAC FK OPTO-COUPLER MODULE**

IN: 250 VAC - OUT: 250 VAC / 0,5A

Triac 0.5 A  
230 V AC  
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	2.5 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

**Output**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 0.3 mA
Switching time ON/OFF	10/10 ms
Saturation voltage (across output)	max. 1.5 V AC
Switching voltage	12...250 V AC
Switching frequency	max. 20 Hz, depending on suppression
Switching current per output	2 mA...0.5 A

**Input**

Control current	7 mA
Voltage range OFF	0...80 V AC
Voltage range ON	140...250 V AC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879021692
eClass	27371601
Packaging unit	1.000