
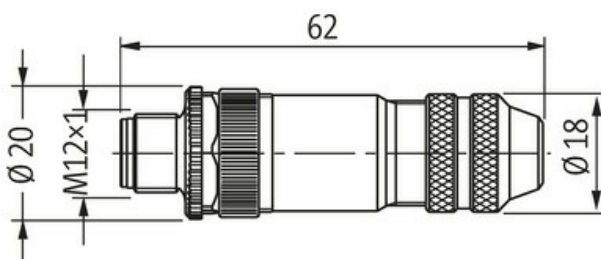
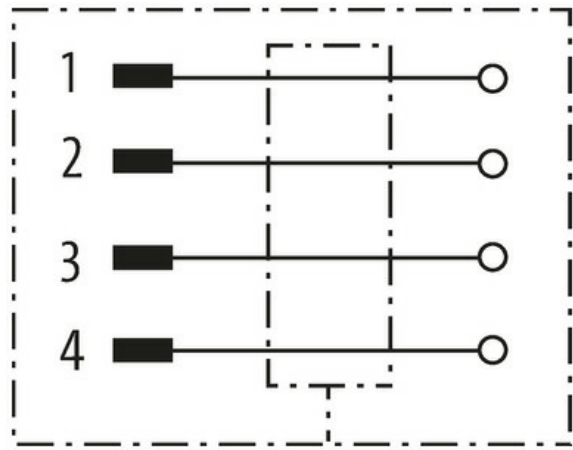


M12 D-CODE MALE STRAIGHT 6..8MM


Ethernet CAT5
 Male straight
 M12, 4-pole
 D-coded
 shielded
 Screw terminals
 Sealing range (cable Ø): 6...8 mm

[Link to Product](#)**Illustration**

Male



Product may differ from Image

**Form**

Form 14591

Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 4 A
Transfer parameters	CAT5, Class D (ISO/IEC 11801:2002), (EN 50173-1)

The information in this brochure has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Transfer rate	up to 100 Mbit/s full duplex
Coding	M12, D-coded
Connection cross section	max. 0.75 mm ²
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Zinc die casting, matte nickel plated

General data

Temperature range	-40...+85 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879536639
eClass	27279221
Packaging unit	1.000