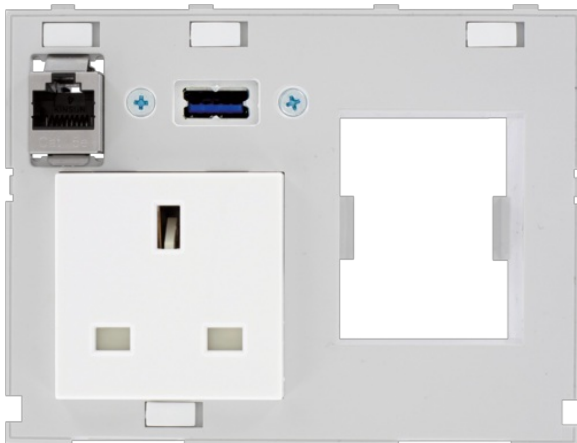


MODLINK MSDD DBL COMBI INSERT GREAT BRITAIN

1xUSB, 1xRJ45 fem./fem. + RCD opening

1 × Great Britain (BS)
 1 × RJ45, 8-pole metal, CAT5e (female/female)
 1 × FI cut-out
 1 × USB 3.0 (female/female) form A

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Dimensions HxWxD	88x116x70 mm
------------------	--------------

RJ45

Operating current (UL Rating)	max. 175 mA
Locking of ports	Snap In
Connection front side	RJ45
Connection rear side	RJ45
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC
Specification	CAT5e, Class D, 100 MHz, (EN 50173-1)

USB

Operating current	1.5 A
Specification	USB: 3.0 (max. 5 Gbit/s)
Locking of ports	Snap In
Operating voltage	48 V AC/DC
Operating voltage (UL Rating)	max. 30 V AC/42.4 V DC

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879547079
eClass	27189217
Packaging unit	1.000