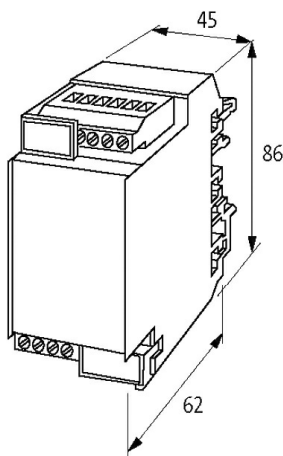
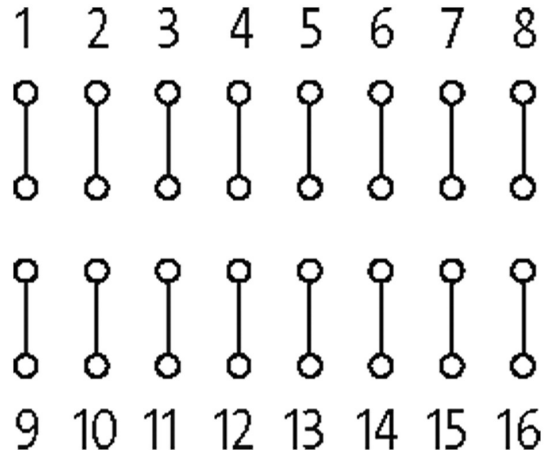


**ASSEMBLY MODULE MKS - M 8**

Mounting rail / screw-type terminal

8 pairs of solder pins  
screw terminals connected to solder pin pairs

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Operating voltage	max. 250 V AC/DC
Operating current	max. 5 A
Distance of solder pins	40 mm

**General data**

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	-20...+60 °C
Housing	Plastic, flame retardant. Cover removable
Connection	Screw terminals: max. 4 mm <sup>2</sup> , pairs of solder pins (spacing 5 mm)
Dimensions H×W×D	68×45×65 mm

**Commercial data**

country of origin	CZ
customs tariff number	85369010

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

EAN	4048879041805
eClass	27379201
Packaging unit	1.000