

## Xelity 10 TX IP67 M GE 4P

10 Port GE without PN

M12 Power, 4-pole, L-coded

Supply PIN 1/3

Connection cables are in the online shop under "Connection Technology".


### [Link to Product](#)

#### Illustration





Male

Female

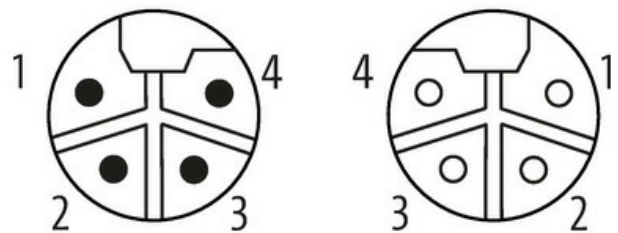

Female

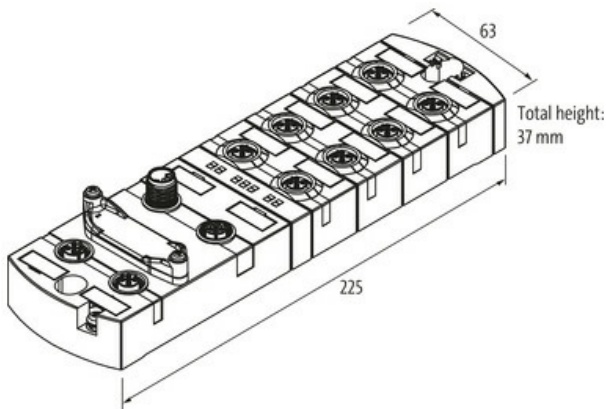

Product may differ from Image

#### Technical Data

Operating voltage	9...36 V
Transfer rate	10/100/1000 Mbit/s full duplex
Operating modes	Autocrossing Autonegotiation

#### General data

Mounting method	2-hole screw mounting
Temperature range	-25...+70 °C, ...+70 °C derating (storage temperature -40...+85 °C)
Housing	Metal
Protection	IP67
Dimensions HxWxD	37x63x225 mm

#### Connections

Fieldbus	10x M12 (female), X-coded
Supply	2x M12 Power, 4-pole, L-coded, 2x max. 16 A

#### Switch Management

Protocols	DHCP, SNMP (v1, v2c, v3), RSTP, STP, LLDP, NTP, RMON, SSH (CLI) Syslog
-----------	--

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

NAT	yes
Port Mirroring	yes
VLAN (QoS) IEEE 802.p	yes
Alarm contact	no
Remote maintenance	Open VPN
Webserver	HTTP, HTTPS
Switch Form	Managed Switch

**Diagnostic**

Communication status	via LED, LLDP
Monitoring - no voltage	yes

**Commercial data**

country of origin	DE
customs tariff number	85176200
EAN	4048879866293
Packaging unit	1.000