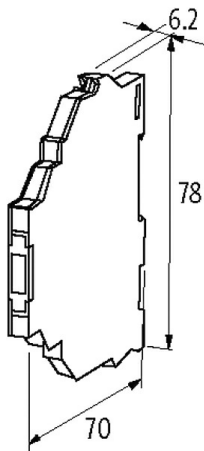
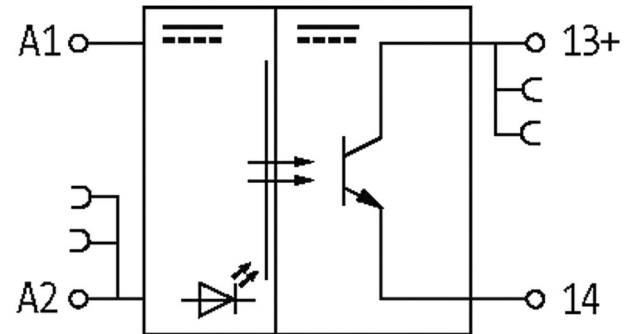


**MIRO TR 48VDC FK OPTO-COUPLER MODULE**

IN: 56 VDC - OUT: 48 VDC / 0,5 A

Transistor 0.5 A  
48 V DC  
Spring clamp terminals

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	-20...+60 °C
Test isolation voltage	3.75 kV
Housing	Black plastic, flame retardant
Dimensions HxWxD	78x6.2x70 mm

**Output**

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 03/22

Leakage current (output is open)	max. 10 $\mu$ A
Switching time ON/OFF	20/100 $\mu$ s
Saturation voltage (across output)	max. 1.2 V DC
Switching voltage	5...48 V DC
Switching frequency	max. 1 kHz/10 Hz (resist./ind.)
Switching current per output	0.1 mA...0.5 A

**Input**

Control current	6 mA
Voltage range OFF	0...12 V DC
Voltage range ON	18...56 V DC
LED display	LED (yellow)

**Commercial data**

country of origin	CZ
customs tariff number	85414900
EAN	4048879021845
eClass	27371601
Packaging unit	1.000