

**7/8" FEMALE 0° FIELD-WIREABLE SCREW**

4-pol. clamp section 6-8 mm

Female straight

7/8" (3-pole)




Screw terminals

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Female

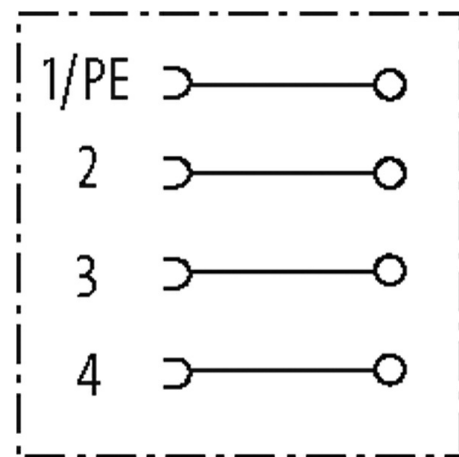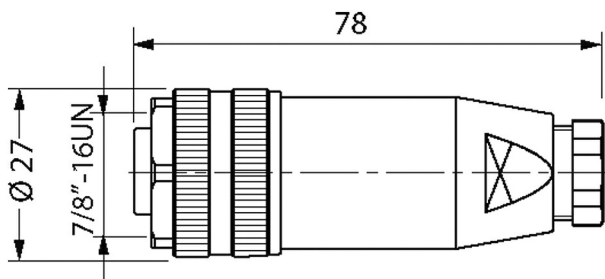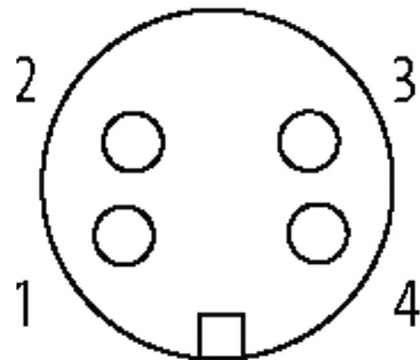

Product may differ from Image

**Technical Data**

Operating voltage	max. 300 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 1.5 mm <sup>2</sup>
Sealing range (cable Ø)	6...8 mm
Protection	IP67 inserted and tightened (EN 60529)

