

SVS VALVE PLUG FORM A 18MM FIELD-WIREABLE

24V LED+Z-Diode M16x1.5




Form A (18 mm)
24 V AC/DC $\pm 25\%$
LED and Z-diode
metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

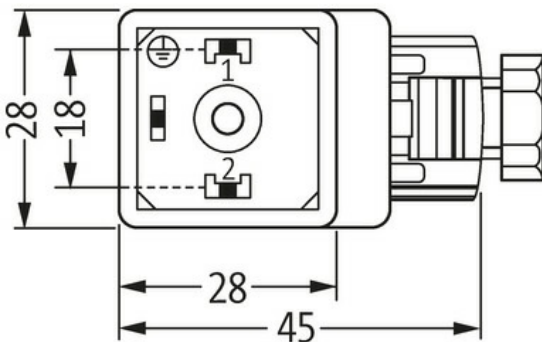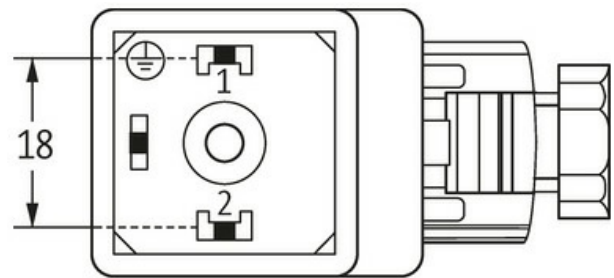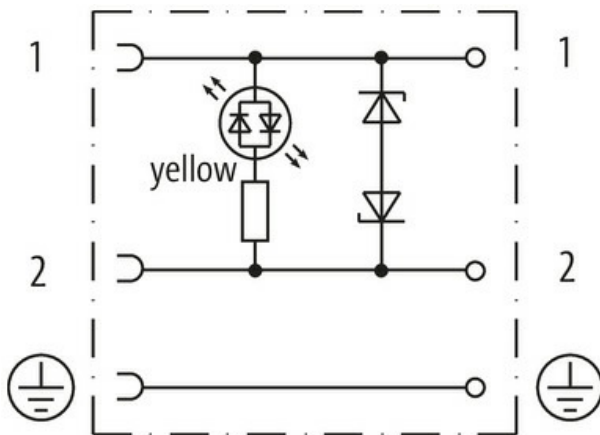

Height: 41 mm

Product may differ from Image

Form

Form 29001

Technical Data

Operating voltage	24 V AC/DC $\pm 25\%$
Operating current per contact	max. 4 A
Locking of ports	M3 (recommended torque 0.4 Nm)
Sealing range (cable \varnothing)	5...10 mm
Protection	IP65 inserted and tightened (EN 60529)
Tightening torque (clamp screw)	0.1 Nm

Configuration 2 contacts + PE

General data

Temperature range -20...+60 °C

Commercial data

country of origin	CN
customs tariff number	85366990
EAN	4048879187688
eClass	27279221
Packaging unit	1.000